

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



16684.7

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A46B 9/04	A1	(11) International Publication Number: WO 97/25899 (43) International Publication Date: 24 July 1997 (24.07.97)
--	----	---

(21) International Application Number: PCT/US97/00968

(22) International Filing Date: 17 January 1997 (17.01.97)

(30) Priority Data:
9601012.9 18 January 1996 (18.01.96) GB

(71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): CANN, David, Victor [GB/GB]; Crescent Cottage, Stonehill Road, Surrey KT16 0ER (GB).


(74) Agents: REED, David, T. et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).

(81) Designated States: HU, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: A TOOTHBRUSH WITH ELASTOMER FILLED FLEXIBLE HEAD

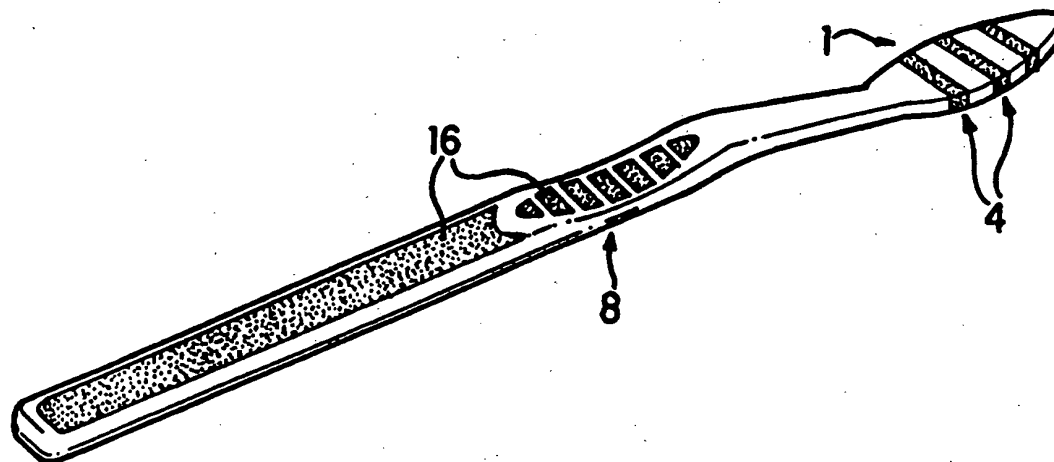

(57) Abstract

A toothbrush having an elongate handle (8) having distal and proximal ends with one or more elastomeric handle regions (16) therein. The toothbrush having a resiliently flexible head (1) attached to the proximal end of the handle and including a pair of opposed faces. One of the faces being a bristle-bearing face with bristles (6) attached to and extending from the face. At least one of the faces has one or more elastomer containing transverse grooves (4) and one or more supply channels (9) extending between the elastomeric handle regions and the transverse grooves. At least one of the elastomeric handle regions and the transverse grooves can be filled with elastomer from a single injection point. The elastomeric regions in the head can be used to make the head flexible and the whole brush can conveniently be made on conventional machines.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A TOOTHBRUSH WITH ELASTOMER FILLED FLEXIBLE HEAD

10

Field of the Invention

The present invention relates to a toothbrush, more particularly to a toothbrush with a comprising regions of elastomer in both the head and the handle wherein one or more elastomer supply channels connect the regions so that they can all be filled with elastomer from a single injection point.

15

Background of the Invention

The configuration of human teeth requires that the ideal bristle contour for toothbrushes for brushing the buccal or outside surfaces of teeth be concave and that the ideal bristle contour for brushing the lingual or inside surfaces of teeth be convex. Most brushes have a single piece head which is of comparable thickness to the handle and which is relatively rigid and of a fixed curvature or configuration.

20

A further drawback of conventional brushes is that pressing the brush sufficiently hard against the teeth to get good cleaning risks damaging or discomforting the softer, adjacent gums. To a certain extent this can be solved by modifying the configuration of the brush, or by varying bristle hardness or length, though again, a single configuration cannot be optimum for all circumstances.

25

Some brushes may, however, incorporate a means for allowing the head to flex relative to the handle, as described for example in EP-A-371,293. Even so, such brushes have limited effectiveness. Other brushes are known which are adjustable into several different but fixed configurations. Adjustable toothbrushes are often difficult to manipulate and may be unreliable.

30

WO 92/17093 discloses a toothbrush having a handle and at one end thereof a bristle-bearing head, wherein the head is in the form of two or more segments flexibly and resiliently linked to each other and/or to the handle, one or more of the segments being bristle bearing. In one embodiment this is achieved by the use of transverse, and optionally longitudinal, grooves on the opposite face of the head to the bristles. The grooves can be wholly or partially filled with an elastomer.

35

Co-filed application WO 92/17092 further discloses a toothbrush having a handle and at one end thereof a bristle-bearing head which is flexibly and resiliently linked to an extended portion of the handle. The space between the head and the handle may be

- 2 -

- 5 filled with an elastomer. The applicant markets a brush called the 'Schwingkopf' under the name 'Dr. Best' which contains some of the features disclosed in WO 92/17092. The brush has an elastomeric handle grip and an elastomer filled groove connecting the grip to an elastomer filled region in the neck of the brush. However, the brush does not contain transverse grooves in the head.
- 10 It is well-known to provide elastomeric grips in the handles of toothbrushes. It is also known from the above-mentioned PCT applications to provide transverse grooves containing elastomer into a brush head. To the present applicant's knowledge however, it has not been disclosed how both these objects can be achieved using a conventional single-point, injection moulding process.
- 15 It has now been found that all of the elastomer filled areas of the brush can be filled by a single-point injection moulding process by providing one or more elastomer supply channels which connect the grooves in the head to the grips in the handle.
- It is accordingly an object of this invention to provide a toothbrush with a flexible head and handle grips which can be made by a simple injection moulding process.
- 20 It is yet a further object of this invention to provide a toothbrush which has good long-term durability.

Summary of the Invention

According to one aspect of the present invention there is provided a toothbrush, comprising:

- 25 i) an elongated handle having distal and proximal ends and one or more elastomeric handle regions therein; and
- ii) a resiliently flexible head attached to the proximal end of the handle, the head including a pair of opposing faces, one of the pair being a bristle-bearing face with bristles attached to and extending from the face, wherein at least one of the pair
- 30 has one or more elastomer-containing, transverse grooves therein; and
- iii) one or more elastomer supply channels extending between the elastomeric handle regions and the transverse grooves,

whereby at least one of the elastomeric handle regions and the transverse grooves can be filled with elastomer from a single injection point.

- 35 According to a second aspect of the invention there is provided a toothbrush, comprising:
- i) an elongated handle having distal and proximal ends and one or more elastomeric handle regions therein; and

- 5 ii) a resiliently flexible head attached to the proximal end of the handle, the head including a pair of opposing faces, one of the pair being a bristle-bearing face with bristles attached to and extending from the face, wherein each of the pair has one or more elastomer-containing, transverse grooves therein, the grooves dividing the head into segments which are flexibly connected by hinges, wherein each hinge is located between the opposing faces and at a distance of at least about 10% of the depth of the head from each of the faces, the hinges being less than the full width of the head; and
- 10
- iii) one or more elastomer supply channels extending between the elastomeric handle regions and the transverse grooves,
- 15 whereby at least one of the elastomeric handle regions and the transverse grooves can be filled with elastomer from a single injection point.
- The toothbrush of this invention comprises a handle including elastomeric regions, which can be used to improve the user's grip on the handle, and a head which has transverse grooves that allow the head to flex under the action of brushing and accommodate itself to, for example, the differing profiles of individual users' teeth.
- 20 The head further includes elastomer contained within the grooves on at least one face. The elastomer improves the resilience of the head by acting like a spring, so that when a force applied to bend the head is removed, the head returns within a short period of time to its original configuration. The toothbrush further comprises one or more supply channels which connect the elastomeric regions in the handle to the transverse grooves in the head enabling the elastomer in both the head grooves and handle regions to be supplied from a single elastomer injection point. The grooves divide the head into segments and define hinges which connect the segments.
- 25 Preferably, there are transverse grooves on both of the opposing faces and the hinges are located between the faces so that they are subject to the minimum amount of tension or compression. In this case the hinges are preferably less than the full width of the head so that elastomer can flow from one face of the head to the opposing face. The interconnectivity of the elastomer containing parts enables all of them to be filled with elastomer using a single-point injection moulding process on conventional equipment.
- 30
- 35

Detailed Description of the Invention

Handle

The toothbrush of this invention comprises an elongated handle having distal and proximal ends and one or more elastomeric handle regions therein. The handle can be of shape and external dimension suitable for toothbrushes. The elastomeric regions in

40

- 4 -

5 the handle are generally designed to act as hand or finger grips but they can be provided for solely aesthetic purposes, for example to give the brush a distinctive appearance. The elastomeric regions can be flush with the surface of the handle or raised or recessed from the handle surface. Preferably at least a part of one elastomeric region is raised for providing better grip. In general the elastomeric regions are provided by initially moulding the handle to comprise voids which are then filled by the elastomer in a separate injection moulding step. The voids provide some physical entrapment of the elastomer, but preferably the elastomer is chosen so that it becomes bonded to the handle material through the injection moulding process. The voids can be arranged so that when filled with elastomer the various elastomer regions, at least when handle material is opaque, give the appearance of being completely discrete. At least one, preferably all, of the elastomeric regions in the handle is connected by the elastomer supply channel(s) described below to the transverse grooves in the head. Typically, the elastomer in the grips of the handle is a substantial part of the total volume of elastomer to be injected. For this reason the elastomer injection point is preferably located at the distal end of the handle. In this context, 'at the distal end of the handle' means that the injection point is located closer to the distal end than to the proximal end of the handle.

The handle, and also the toothbrush head, are generally made of relatively non-compressible materials, preferably with a modulus of elasticity of at least about 500 MPa, more preferably at least about 1000 MPa, which are conventional in the manufacture of toothbrushes, especially plastics materials. Suitable plastics materials include, for example, polyamides and polypropylenes. Polypropylene is preferred. Suitable polypropylenes include the material 'Polypropylene PM 1600' (marketed by Shell), having a modulus of elasticity (ISO 178) of 1500 MPa and Apryl 3400 MA1 from Elf Atochem. Preferably, a foaming agent such as Hydrocerol HP20DP from Boehringer-Mannheim is mixed with the polypropylene at a level of from about 1% to about 3%, preferably from about 1.5% to about 2.5%, by weight of the polypropylene. The foaming agent assists the flow of the polypropylene during moulding and, in particular, helps to ensure uniform formation of the hinges in the head.

35 Suitable elastomers for use herein include thermoplastic elastomers with a Shore hardness of 30 - 80 and a modulus of elasticity of less than about 500 MPa, preferably less than about 300 MPa, such as Santoprene and Thermoflex. An exemplary elastomer is 'PTS Thermoflex 75' (marketed by Plastic Technologie Service, Germany), having a modulus of elasticity (ISO 178) of 100 MPa and a hardness (ISO 868) of 80 Shore A. Elastomers PL12291, PL12292, and PL12293 (marketed by Multibase, Saint Laurent Du Pont, France) are also suitable for use herein. In

- 5 general, choosing the elastomer so that is based upon the same chemical class of polymers as material of the head segments assists in bonding the elastomer to the head segments. For example, when the head segments are made from polypropylene, the elastomer is preferably based upon polypropylene. The elastomers can optionally be mixed with a suitable plasticiser or foaming agent to make them more compressible.
- 10 The colour of the elastomer material can be the same as that of the head segments, or it may be different thereby achieving a distinctive striped or otherwise patterned appearance.

The handle itself is generally rigid. Optionally, the handle may comprise a neck portion which is more flexible than the rest of the handle, as known in the art, provided that it is sufficiently rigid that, in use, when force is applied to the head, particularly when brushing the teeth, the head still flexes in the manner and to the extent described below.

Head

The toothbrush of this invention further comprises a resiliently flexible head attached to the proximal end of the handle, the head including a pair of opposing faces, one of the pair being a bristle-bearing face with bristles attached to and extending from the face, wherein at least one of the pair has one or more elastomer-containing, transverse grooves therein.

Suitable materials for the head are the same as those for the handle. Preferably the head and handle are co-moulded in a single injection moulding step, so that the head and handle form one continuous piece. In any case the long axis of the handle defines a longitudinal axis of the head. The head also has a transverse axis lying orthogonal to the longitudinal axis and generally parallel to the opposed faces. References to transverse or longitudinal herein refer to directions which are respectively parallel to these transverse and longitudinal axes, unless indicated otherwise. The head itself is also generally elongated, with its elongated axis also being a longitudinal axis.

The head includes transverse grooves on at least one of the bristle-bearing face and the opposing face, the grooves dividing the head into segments. The grooves allow the head to flex or bend along its longitudinal axis. This allows the brush head to flex so that it acquires a convex profile along the longitudinal axis when pressed against the teeth. This makes it particularly suitable for brushing the lingual or inside surfaces of the teeth. The grooves can be linear or non-linear, such as curved or zigzag. Non-linear grooves help to offset compression stress in the elastomeric material filling the grooves as the head bends. The term 'transverse grooves' as used herein can also encompass grooves whose main axis, as defined by the straight line

- 5 joining the start and endpoints of the grooves is offset from the transverse axis of the head by an angle of up to and including 45° . In preferred embodiments both the bristle-bearing face and the opposing face include one or more transverse grooves therein.

The head also includes one or more longitudinal grooves on at least one of the bristle-bearing face and the opposing face. The term 'longitudinal grooves' as used herein
10 can also encompass grooves whose main axis, as defined by the straight line joining the start and endpoints of the grooves is offset from the 'longitudinal axis of the head by an angle of up to 45° . Longitudinal grooves can allow, for example, the outer longitudinal rows of bristles to flex away from the inner ones. They also act as
15 elastomer supply channel(s) to the transverse grooves as described below.

Where there are grooves on both of the opposing faces, grooves on one face can be directly opposed to grooves on the other face or partially or wholly offset. Preferably, the grooves are directly opposed or only partially offset.

The grooves, which separate the segments of the head, also define hinges, which are
20 thinned regions of the head at the base of the grooves.

The grooves can be of variable width and depth and the distances between grooves can also be varied. In this manner the flexibility of the head along the length and / or across the breadth of the head can be modified. Preferably only transverse grooves are varied in this way. Changing the depth of the grooves controls the location and
25 thickness of the hinges which connect the segments. For a toothbrush head of between about 4 to about 6 mm thickness, typically about 5 mm, suitable groove depths are in the range from about 1.4 to about 3 mm, preferably from about 1.5 to about 2.8 mm. Suitable hinge thicknesses are in the range from about 0.4 to about 2.0 mm, preferably from about 0.5 to about 1.5 mm. Where transverse grooves are
30 used then, desirably, the hinges which are or will be nearer to the handle are less flexible than those which are or will be more remote from it. In this way more uniform bending of the head can be achieved. The variation in flexibility can be achieved by varying the hinge thicknesses. In a preferred embodiment the hinge nearest the handle is up to about 3 times, preferably up to about 2 times as thick as
35 the hinge most remote from the handle. An exemplary set of hinge thicknesses for a toothbrush with 3 transverse grooves are respectively about 1.2, 0.6 and 0.6 mm reading from the handle end. If identical hinges are used along the brush head then there is a tendency for flexing of the head to occur predominantly at the hinge nearest the handle. The depth of grooves on the bristle bearing face can be different to those
40 on the opposing face. Preferably the grooves on the bristle-bearing face are less deep

5 than those on the opposing face. In embodiments where there is elastomer in the grooves on both faces, this allows more elastomer to be put under compression than under tension. The elastomer to segment bonds are stronger under compression than under tension.

10 Increasing the width of the grooves increase the gap between the segments and therefore the length of the hinges, which increases their flexibility. However, since it is preferred to insert bristles into the segments rather than into the elastomer, increased groove length also leaves less space for the bristles, within a given head size. Suitable groove widths are in the range from about 0.3 to about 3.0 mm, preferably from about 1.2 to about 2.0 mm. The grooves are preferably tapered
15 slightly inwards towards the bottom of the groove, suitably converging at an angle of from about 3 to about 10°, to facilitate moulding. As the brush is flexed the width of the groove changes, more rapidly at the top of the groove than at the bottom of the groove, the relative change being a function of the groove width and depth. Since this change in groove width results in compression or tension of elastomer contained
20 within the groove, it can be seen that, for a given elastomer, the groove geometry can be used to control the flex angle.

The hinges can be the full length of the grooves or, preferably, there can be one or more gaps in or to the side of the hinges the grooves in these regions being the full depth of the head. The gap allows elastomer to flow from one face to the other
25 during the moulding process so that elastomer can be used on both sides of the head and yet still supplied from a single injection point. In a preferred embodiment, the hinges are discontinuous, with two or more hinges, preferably just two, connecting each segment to its neighbour or to the handle. In this embodiment there are gaps between the hinges and to each side. In linear grooves, the hinge widths are not
30 generally critical, provided that they are such that gaps are still created, however, wide hinges can be subject to distortion if they are used within a non-linear groove. Suitable hinge widths are in the range from about 0.5 to about 4.0 mm, preferably from about 1.0 to about 3.0 mm.

It is preferred that each hinge is located between the two faces and at a distance of at
35 least about 10%, preferably at least about 20%, more preferably at least about 30% of the depth of the head from each of the faces. The distance of the hinge from the face is measured by the perpendicular line drawn from the top of the face to the nearest boundary surface of the centre of the hinge. Locating the hinges away from the faces of the brush means that they are subject to less stretching or compression as the head
40 is flexed and improves their durability. In a particularly preferred embodiment, the brush head has transverse grooves which are arranged in pairs such that one member

- 5 of each pair is on each face and directly opposes the other member of the pair, with one or more hinges therebetween connecting the segments so that each hinge is located between the two faces and at a distance of at least about 10%, preferably at least about 20%, more preferably at least about 30% of the depth of the head from each of the faces.
- 10 The grooves on at least one face of the brush contain elastomer, preferably bonded to the segments of the head. The term 'elastomer' herein refers to a material which is both elastically compressible and elastically extensible. Thus when the head is flexed in a direction orthogonal to the opposed faces, the elastomer is put either under tension or under compression. The elastomer has the effect of limiting the head
- 15 flexibility thereby reducing the stretching or compression of the hinges and of limiting the stress at the bond between the elastomer and the head segments. A more durable head is thus obtained. Preferably, grooves on both the bristle-bearing face and the opposing face contain elastomer so that elastomer is put under compression whichever direction is chosen. The elastomer on the opposed face is of course put under tension
- 20 but the tensile stress on the elastomer to segment bonds is limited and is shared with the hinge material.

Preferably all of the grooves are wholly filled with the elastomer. Complete filling of the grooves has an advantage of, for example, avoiding contamination of the grooves by toothpaste deposits. The grooves can be partially filled though, provided that

25 sufficient elastomer is used to give effective moderation of the flexibility of the head.

The whole head has a conventional, generally flattened shape but remains flexible when compared to that of a conventional brush. By 'flexible' is meant herein that when a 3 Newton force is applied to one end of the head, the other end being held fixed, the end to which the force is applied will deflect through an angle of at least

30 2°. The end of the head which is to be held fixed is defined by the line which is perpendicular to the axis along which bending takes place and which touches the first row of bristles. In the preferred embodiments having transverse grooves, where the head bends along the longitudinal axis, the end should be that which connects to the handle. The end of the head where the force is to be applied is the opposite end of

35 the head at the furthest point away along the bending axis. By 'resiliently flexible' is meant that when the 3 Newton force is removed, the head will return to its original position without the application of external force. The angle through which the head bends when a 3 Newton force is applied as above is referred to herein as the flex angle. The flex angle can conveniently be measured by measuring the vertical

40 displacement (y) of the free end of the head under a 3 Newton force and the distance y and the distance between the clamping point and the application of the force (x), the

- 5 flex angle being derived by the relationship $\tan(\text{flex angle}) = y/x$. In preferred
embodiments the flex angle is at least 3° , more preferably at least 5° and it can be as
high as 15° or more. The construction of the head, in particular the dimensions of
the grooves and hinges, the extent of elastomer filling of the grooves and hardness of
the elastomer is, however, such that the flex angle is limited to less than about 40° ,
10 preferably less than 30° , more preferably less than 20° . This has been found to give
an acceptable degree of flexibility for users without exposing the hinges and
elastomer-segment bonds to undue stress.

In highly preferred embodiments, only one of the opposed faces is bristle-bearing and
when the head is in its normal unstressed state, the free ends of bristles lying along a
15 longitudinal axis of the brush form a generally concave profile. In highly preferred
embodiments, the bristle-bearing face is concavely shaped. In these embodiments the
head preferably has a flex angle such that the bristle-bearing face of the head is able to
bend to the extent that the free ends of bristles lying along a longitudinal axis of the
brush form a generally convex profile. The face of the head can be concave along
20 either or both of the orthogonal axes of the head lying within the general plane of the
bristle-bearing face. Where the face is concave along the longitudinal axis, the radius
of curvature may vary along the length of the head. The radius of curvature is
preferably from 10 to 500 mm, more preferably from 15 to 250 mm, especially from
25 to 150 mm.

- 25 The brush head has bristles extending from one of the pair of opposing faces. The
bristles can be made of any of the materials well known in the art. Suitable bristle
materials herein are polyester and nylon, such as Dupont Nylon 612. The bristles are
preferably of circular cross-section but can also be of other cross-sections including,
but not limited to, rectangular, hexagonal and trilocular. Furthermore, the diameter
30 and length of the bristles can vary within the usual dimensions known by a person
skilled in the art. The bristles are generally conventionally grouped into tufts and can
be attached to the brush head by a variety of processes. Preferred processes herein
are stapling and fusion. The bristles can be inserted into the segments or the
elastomer, preferably into the harder material of the segments. Cutting and end-
35 rounding of the bristles can be done using any of the methods commonly known in the
art.

Supply channels

- A further essential feature of the toothbrush of this invention is one or more elastomer
supply channels extending between the elastomeric handle regions and the transverse
40 grooves, whereby at least one, preferably all, of the elastomeric handle regions and the

- 5 transverse grooves can be filled with elastomer from a single injection point. In the head these are conveniently provided by one or more longitudinal grooves intersecting the transverse grooves.

In especially preferred embodiments the brush head comprises both transverse grooves on each of the opposed faces so that the head can bend along the longitudinal axis and
10 at least one longitudinal groove which connects the transverse grooves and extending along the handle to connect further with the voids that are used to form the handle grips. The longitudinal groove permits molten elastomer to flow from an injection point to the elastomeric handle regions and then further to the transverse grooves in the head.

- 15 This is generally achieved by a separate injection moulding step after the moulding of the handle and the segments of the head has been completed. Preferably, all of the elastomer is injected from a single injection point. A preferred method of making the toothbrush of the invention comprises the step of injecting molten elastomer, preferably at a temperature in the range from about 220°C to about 260°C, more
20 preferably from about 230°C to about 250°C, under pressure, into the injection point and causing it to flow along the supply channel and into the grooves. Suitable injection pressures are in the range from about 35 MNm⁻² (350 bar) to about 50 MNm⁻² (500 bar), preferably from about 42 MNm⁻² (420 bar) to about 48 MNm⁻² (480 bar).

- 25 In use, toothbrushes comprising the brush head of this invention can be used for cleaning the teeth by an entirely conventional tooth brushing hand action, preferably in a manner recommended by dental health authorities. The brush head of the invention can also be used in electrically driven toothbrushes or children's toothbrushes.

- 30 The invention will now be described by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a partial side view of a first embodiment of the invention, depicting the toothbrush head with transverse grooves. Although the head is flat in its
35 unstressed state, the bristles are cut to different lengths so that the bristle surface is concave along the longitudinal direction.

Fig. 2 is a plan view of a toothbrush head showing transverse grooves, a longitudinal groove acting as a supply channel, and discontinuous hinges. The bristles are omitted for the sake of clarity.

5 Fig. 3 is a perspective view of a toothbrush according to the invention. The bristles are omitted for the sake of clarity.

Fig. 4 is a perspective view of the toothbrush shown in Fig. 3 with the elastomer not shown in order to show the hinges, grooves and supply channel more clearly.

Fig. 5 is a schematic showing the measurement of the flex angle.

10 Referring to Fig. 1, the brush head (1) has substantially parallel top and bottom faces, comprising segments (2) flexibly connected by hinges of head material (3). The top and bottom faces carry equal numbers of generally parallel transverse grooves (4) filled with elastomer (5). A longitudinal groove (not shown) connects the transverse grooves and extends into the handle (8), acting as a supply channel. Tufts of bristles
15 (6), extending from the top face, form a concave surface (7) at their free ends.

Referring to Fig. 2, a toothbrush head (1) is formed integrally at one end of a handle (8). The head includes three pairs of transverse grooves (4), one of each pair being on each of the top and bottom surfaces. The transverse grooves are in the form of waves and a single longitudinal groove (9) connects the transverse grooves and
20 extends into the handle, acting as a supply channel. The grooves are entirely filled with elastomer (5). The transverse grooves define segments of the head (2) which are connected to each other by hinges (3). There are gaps (10) between and to each side of the hinges so that in the gaps, the elastomer extends from top to bottom surfaces.

In Figs 3 and 4 the head (1) is co-moulded with the handle (8) and is concave along its longitudinal axis on the bristle-bearing (upper) surface. Voids (11) in the handle
25 are filled with elastomer to provide hand grips (16). The voids are connected to each other by a longitudinal groove (12) on the reverse side of the handle which extends into the head and connects the transverse grooves (4) as shown in the view in Figure 2. The elastomer in the voids and the grooves is injected from a single injection point
30 (13) and is of a different colour to the head material to give a distinctive appearance. The head has holes (14) disposed on the top surface thereof to accommodate tufts of bristles.

Fig. 5 illustrates the measurement of the flex angle. The head (1) is clamped (15)
35 against the first row of bristles (6) at the end which is attached to the handle (8) and a 3 Newton force (F) is applied to the opposite end. The dashed lines show the original position of the brush head before the force is applied. The vertical displacement (y) of the free end of the head under the force F is measured and the flex angle is derived from the distance y and the distance between the clamping point and the application of the force (x) by the relationship $\tan(\text{flex angle}) = y/x$.

5

WHAT IS CLAIMED IS:

1. A toothbrush, comprising:

- 10 i) an elongated handle having distal and proximal ends and one or more elastomeric handle regions therein; and
- ii) a resiliently flexible head attached to the proximal end of the handle, the head including a pair of opposing faces, one of the pair being a bristle-bearing face with bristles attached to and extending from the face, wherein at least one of the pair has one or more elastomer-containing, transverse grooves therein; and
- 15 iii) one or more elastomer supply channels extending between the elastomeric handle regions and the transverse grooves,

whereby at least one of the elastomeric handle regions and the transverse grooves can be filled with elastomer from a single injection point.

2. A toothbrush according to Claim 1 wherein all of the elastomeric handle regions and the transverse grooves can be filled with elastomer from a single injection point.
- 20 3. A toothbrush according to Claim 2 wherein at least one supply channel extends to the distal end of the handle.
4. A toothbrush according to Claim 3 wherein the elastomer injection point is located at the distal end of the handle.
5. A toothbrush according to Claim 4 wherein both the bristle-bearing face and the opposing face include transverse grooves therein.
- 25 6. A toothbrush according to Claim 5 wherein the transverse grooves divide the head into segments which are flexibly connected by hinges, wherein each hinge is located between the opposing faces and at a distance of at least about 10% of the depth of the head from each of the faces, the hinges being less than the full
- 30 width of the head.
7. A toothbrush according to Claim 6 wherein handle is made from an opaque material and the supply channel passes from one face of the handle to its opposite face so that, when filled with elastomer, the supply channel appears to be discontinuous.
- 35 8. A method for making the toothbrush of any of the preceding Claims comprising the step of injecting molten elastomer, under pressure, into the injection point and causing it to flow along the supply channel and into the grooves.

1/2

FIG. 1

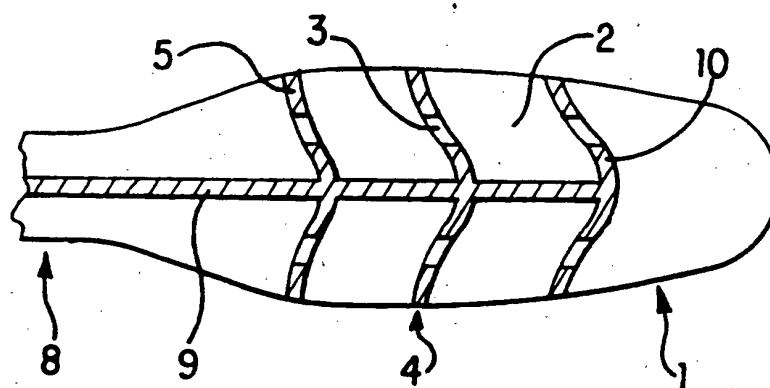
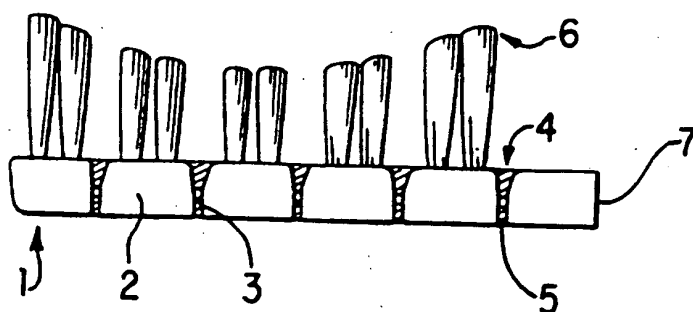


FIG. 2



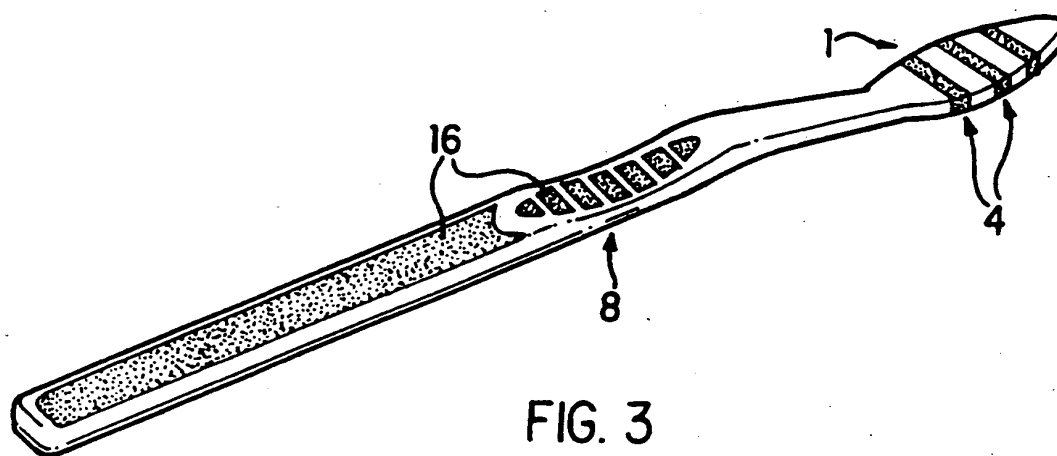


FIG. 3

2/2

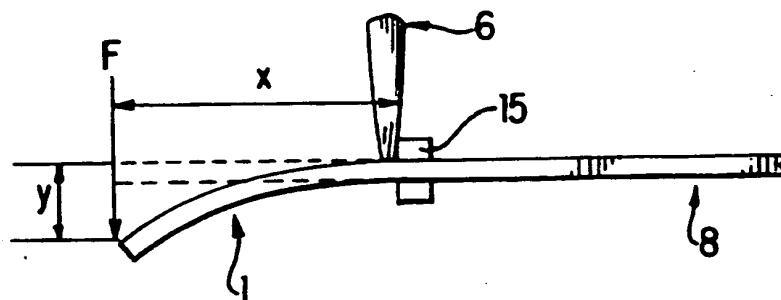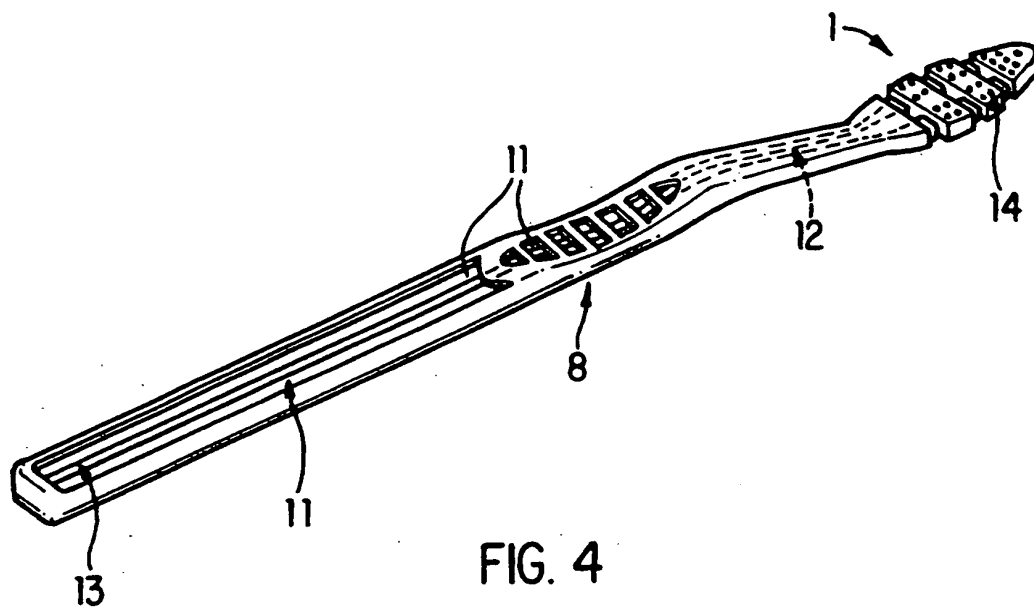

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/00968

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :A46B 9/04

US CL :15/167.1, 172

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 15/167.1, 172

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 92/17093 A (LINGNER + FISCHER GMBH) 15 OCTOBER 1992 SEE ENTIRE DOCUMENT.	1, 2, 8(1,2)
Y	US 5,052,071 A (HALM) 1 OCTOBER 1991 SEE ENTIRE DOCUMENT.	1, 2, 8(1,2)
A	FR 567,187 A (ROBINET) 26 FEBRUARY 1924 SEE ENTIRE DOCUMENT.	NONE
A	US 2,254,365 A (GRIFFITH ET AL.) 2 SEPTEMBER 1941 SEE ENTIRE DOCUMENT	NONE
A	US 2,438,268 A (BRESSLER) 23 MARCH 1948 SEE ENTIRE DOCUMENT.	NONE
A	US 3,188,672 A (GARY) 15 JUNE 1965 SEE ENTIRE DOCUMENT.	NONE

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 15 MARCH 1997	Date of mailing of the international search report 15 APR 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer <i>J. Hurley</i> TERRENCE R. TILL Telephone No. (703) 308-1592

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/00968

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,488,328 A (HYMAN) 18 DECEMBER 1984 SEE ENTIRE DOCUMENT.	NONE
A	US 5,054,154 A (SCHIEFFER ET AL.) 8 OCTOBER 1991 SEE ENTIRE DOCUMENT.	NONE